


LOGIC

PROFESSIONAL DISPLAY

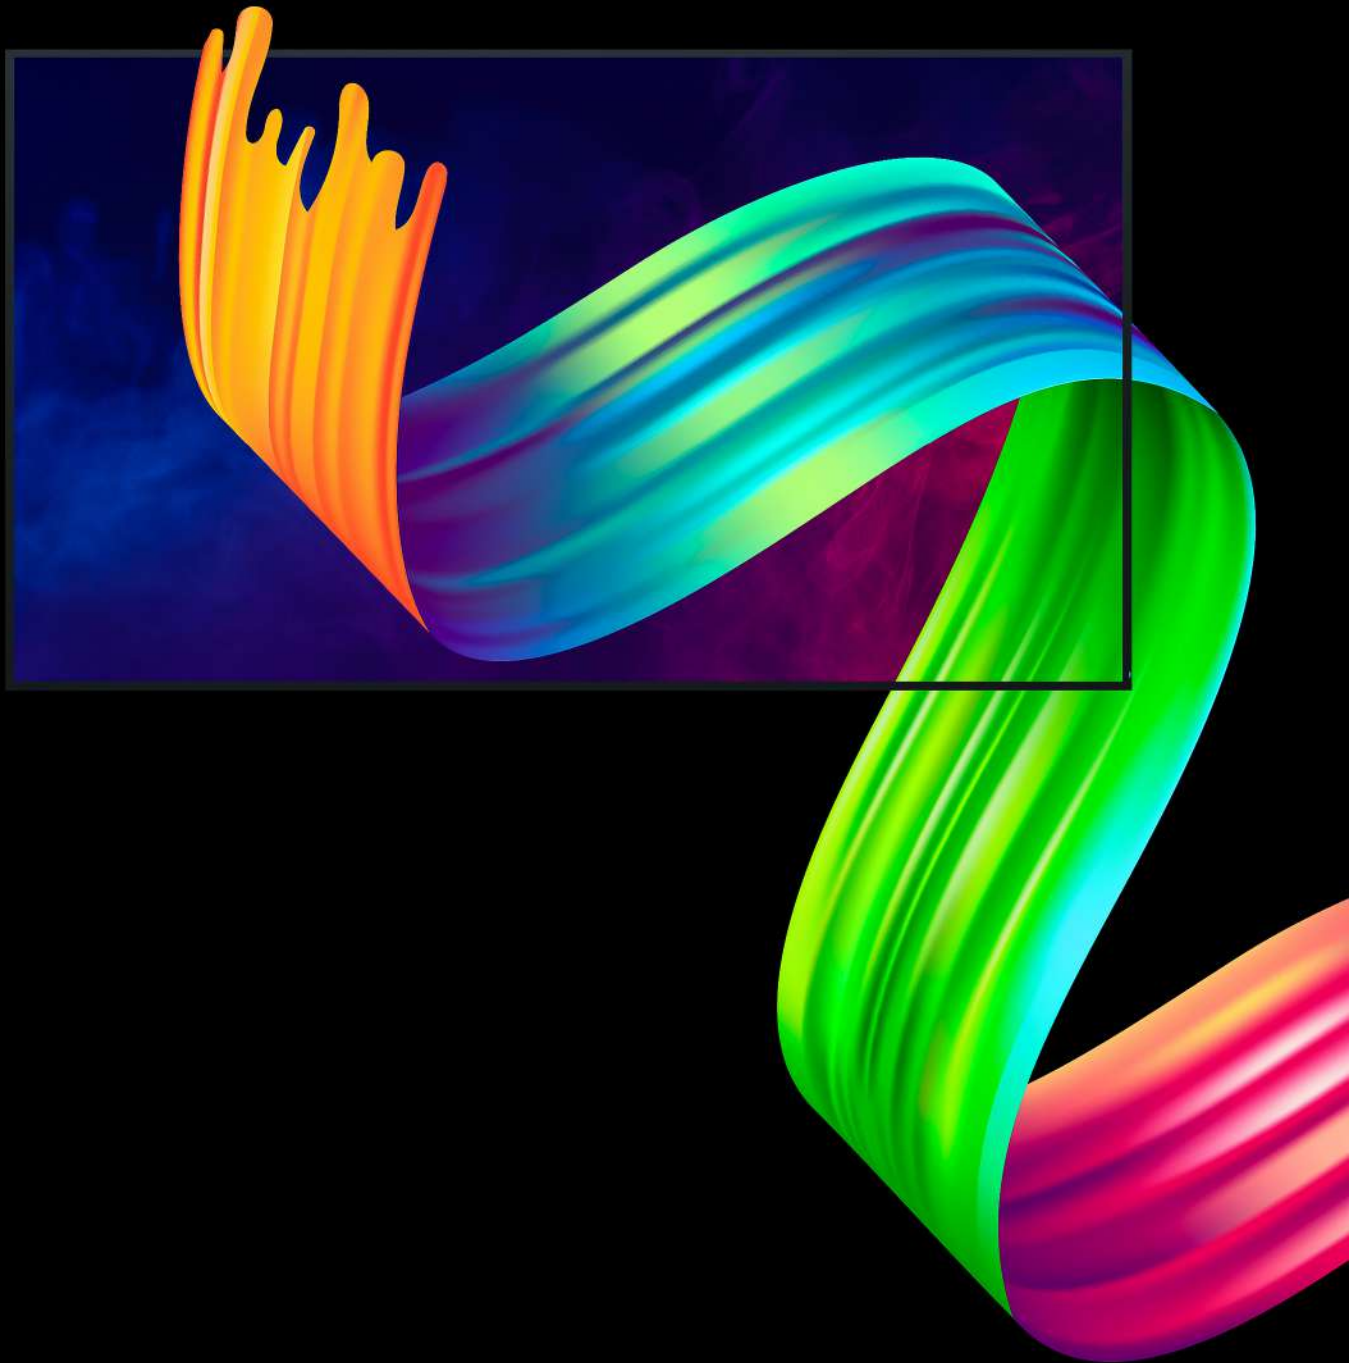

VISTA SERIES

4K ULTRA HD DISPLAY
Unmatched visual effects and clarity

LOGIC

UHD

FHD



Anti-Glare
See clearly with low reflectivity



Flicker-Free
DC dimming for flicker-free viewing



Enhanced Color Calibration
Deliver extreme color accuracy
(Delta E <1.5)



High Brightness
400/ 450* nits brightness
Backlight life of at least 50,000 hours



FLAWLESS DISPLAY ORIENTATION MANAGEMENT

Landscape & Portrait Mode

Built-in gravity sensor enables content auto-rotation

LOGIC



15° TILTING INSTALLATION

Supports 15° of tilt adjustment for easy viewing when screens are installed in high places

LOGIC



MULTI MEDIA PLAYBACK

Simplified way to access & play multimedia files directly from USB

LOGIC



Multi-Mode Play



USB auto play



Auto play after start-up



Playlist scheduling


INSTANT MOBILE CONTENT TRANSFER



CONNECT & SHARE IDEAS FROM ANY DEVICE EFFORTLESSLY

LOGIC

Screen share pro is a wireless presentation application that supports Windows, Mac, iOS, Android, and Chrome devices

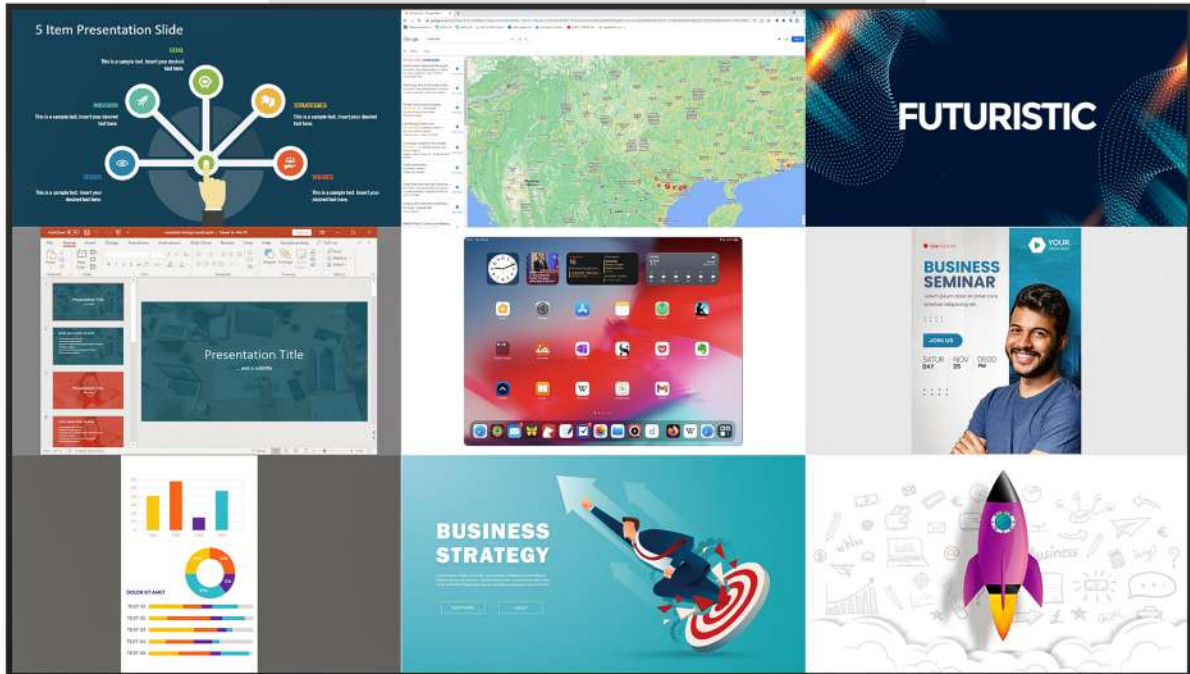


Screen
sharing
up to
9
Parties



BUILT-IN MEDIA PLAYER

Easy content management and playback without need of a PC

LOGIC

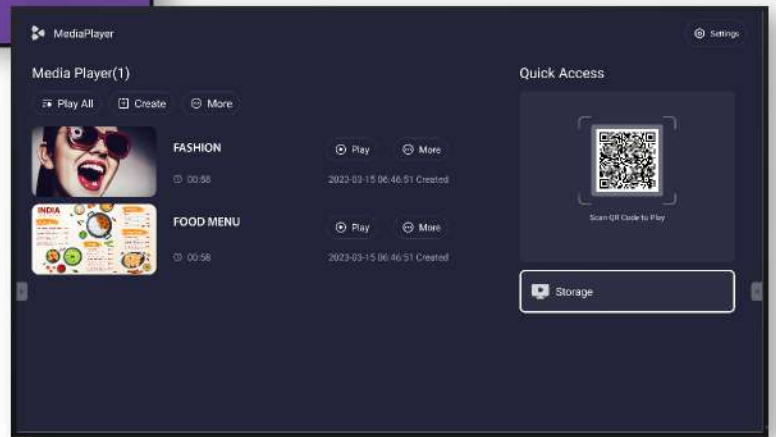

MULTIFUNCTIONAL USB TYPE-C

Type-C port supports 4K audio and video transmission, network connection, charging for external devices, and provides access to external camera.

-  AUDIO
-  VIDEO
-  NETWORK
-  65 W CHARGING
-  CAMERA



New Gen
Type-C Compatibility




SLIM & SYMMETRICAL DESIGN


The sleek bezel gives a redefined luxurious look that matches your surroundings




Symmetric



Slim depth



Narrow Bezel




Long life cycle



NARROW, EVEN-BEZEL

43", 55" - 9.9 mm | 65", 75", 86" - 15.9 mm | 98" - 25.9 mm

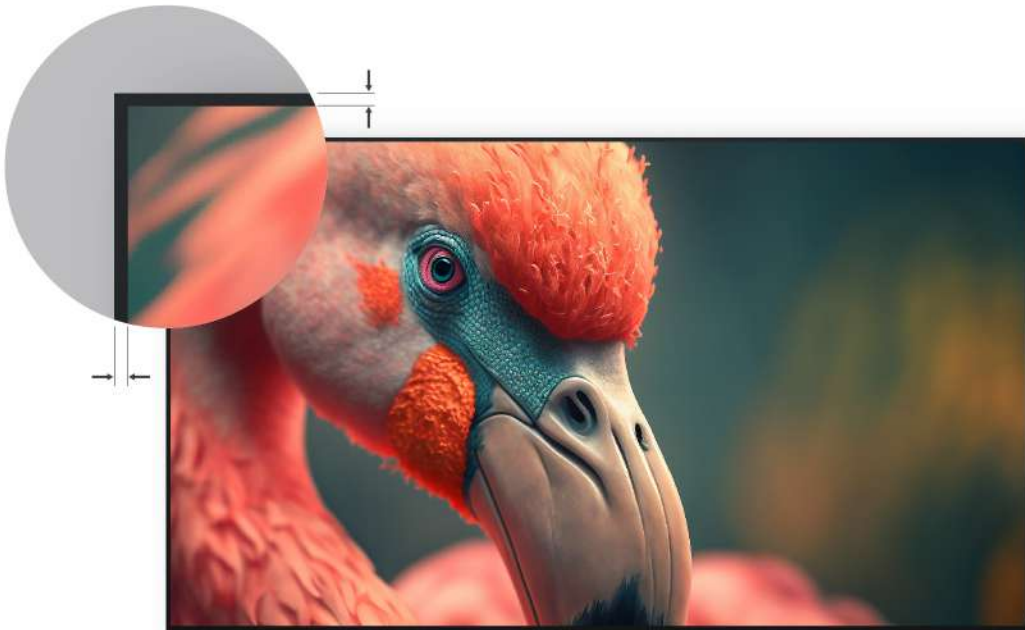


Invisible IR Signal Receiver


LOGIC


LOUDSPEAKERS

Turn up the volume with a pair of powerful, full-range speakers

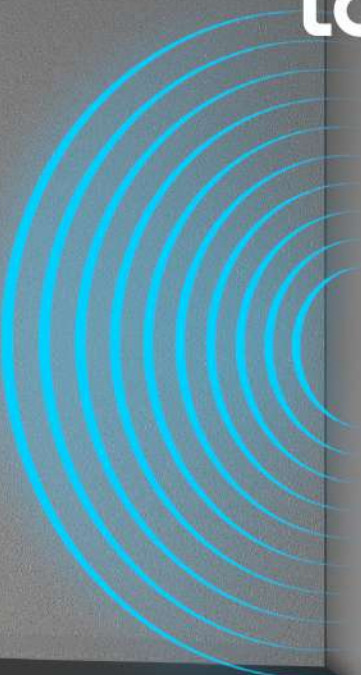

INPUT / OUTPUT PORTS

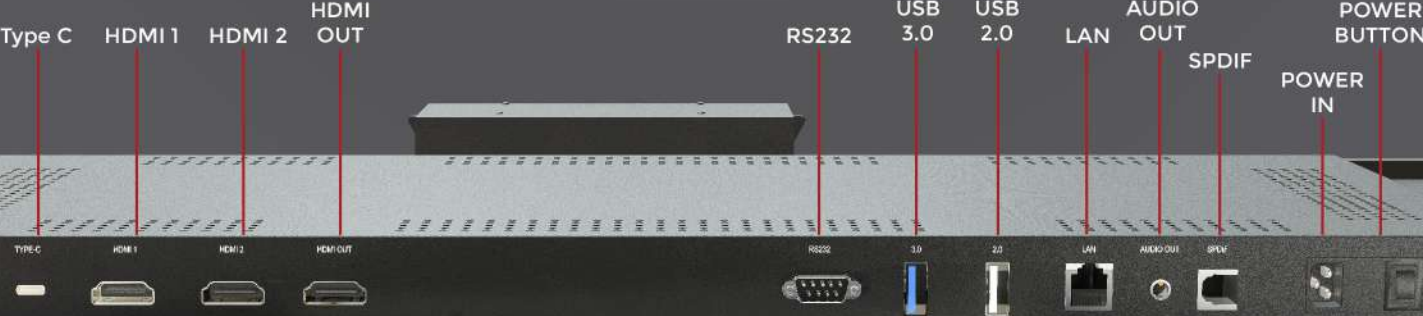

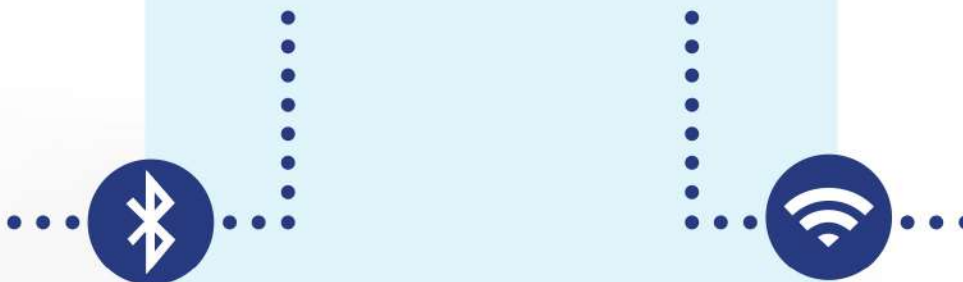

HIGH-PERFORMANCE SYSTEM

Smooth & Stable Operation

LOGIC



Android 11.0



Quad-Core CPU



4GB RAM



32GB ROM



CREATE BEAUTIFUL VIDEO WALL EXPERIENCES

Screen Splicing

HDMI Daisy Chain supports up to 3x3 screens to be spliced

HDMI/ TYPE-C

1	2	3
4	5	6
7	8	9



DEVICE MANAGEMENT SYSTEM (DMS)

Simplified Way of Device Management

LOGIC



Streamlined Application Management:
Centralized, efficient app control




Remote Screen Management:
Effortless control, troubleshoot screens remotely



You Can Remotely Manage and Operate Screens, Including Waking them up or Locking them when Necessary

The integrated Android technology empowers you to maintain full control over your ecosystem, no matter where you are

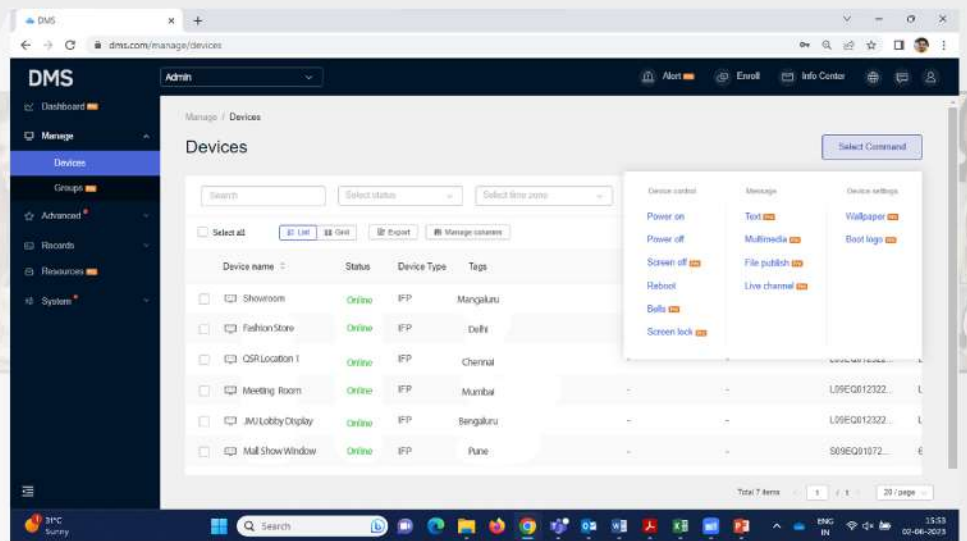

Enterprise

LOGIC



Retail



QSR



Hospitality



PRODUCT SPECIFICATION

MODEL NAME		LV-43UC	LV-55UC
Panel	Screen Size (Diagonal)	43"	55"
	Panel Type	VA	VA
	Resolution	3840 (H) × 2160 (V)	3840 (H) × 2160 (V)
	Back Light Unit	DLED	DLED
	Aspect Ratio	16:9	16:9
	Display Area	941.184 (H) × 529.416 (V) mm	1209.6 (H) × 680.4 (V) mm
	Pixel Pitch	0.2451 × 0.2451 mm	0.315 × 0.315 mm
	Brightness	400 cd/m ²	400 cd/m ²
	Contrast Ratio	5000:1	4000:1
	Viewing Angle	178°/ 178°(H/V)	178°/ 178°(H/V)
	Display Colors	1.07 B	1.07 B
	NTSC	72%	72%
	Operation Hour	18/7	18/7
	Lifetime	≥50000 Hours	≥50000 Hours
	Refresh Rate	60 Hz	60 Hz
Internal Player	Operating System	Android 11.0	Android 11.0
	CPU	A55 × 4	A55 × 4
	GPU	Mali G52MP2	Mali G52MP2
	RAM	4 GB	4 GB
	ROM	32 GB	32 GB
I/O Interfaces	HDMI IN	2	2
	HDMI OUT	1	1
	USB 2.0	1	1
	USB 3.0	1	1
	USB Type C	1	1
	Audio OUT - 3.5 mm (Jack)	1	1
	SPDIF	1	1
	Wi-Fi	Yes	Yes
	RS232	1	1
	RJ45 IN	1	1
Audio	Sound Channel	2.0	2.0
	Built-In Speaker	2 x 10 W	2 x 10 W
	Sound Pressure Level	81 dB	81 dB
	Peak Power	54 W	54 W
Power Supply	Power Supply	100-240V, 50/60Hz 2.5A	100-240V, 50/60Hz 3.0A
	Power Consumption (Max.)	250 W	300 W
	Power Consumption (Typ.)	110 W	150 W
Environmental Conditions	Operation Temperature	0°C~40°C	0°C~40°C
	Operation Humidity	10%~90% RH	10%~90% RH
Physical Specifications	Color	Black	Black
	Bezel	9.9 mm (U/L/R/B)	9.9 mm (U/L/R/B)
	Product Dimension (LxHxD)	964.6 × 552.5 × 71.4 mm	1233 × 703.5 × 71.4 mm
	Set Weight	9.90 kg	13.40 kg
	Package Dimension (LxWxH)	1056 × 156 × 672 mm	1332 × 156 × 819 mm
	Package Weight	13.85 kg	19.50 kg
	VESA Mounting	200 x 200 mm	400 x 200 mm
	Orientation	Landscape / Portrait	Landscape / Portrait
	Accessories	Remote Control x 1, Wall Mount x 1, HDMI Cable x 1, Power Cord x 1	

PRODUCT SPECIFICATION

MODEL NAME		LV-65UC	LV-75UC
Panel	Screen Size (Diagonal)	65"	75"
	Panel Type	ADS	ADS
	Resolution	3840(H) × 2160(V)	3840(H) × 2160(V)
	Back Light Unit	DLED	DLED
	Aspect Ratio	16:9	16:9
	Display Area	1428.48(H) × 803.52(V) mm	1649.664(H) × 927.936(V) mm
	Pixel Pitch	0.372 × 0.372 mm	0.4296 × 0.4296 mm
	Brightness	400 cd/m ²	400 cd/m ²
	Contrast Ratio	1200:1	1200:1
	Viewing Angle	178° / 178° (H/V)	178° / 178° (H/V)
	Display Colors	1.07B	1.07B
	NTSC	72%	72%
	Operation Hour	18/7	18/7
	Lifetime	≥50000 Hours	≥50000 Hours
	Refresh Rate	60Hz	60Hz
Internal Player	Operating System	Android 11.0	Android 11.0
	CPU	A55 × 4	A55 × 4
	GPU	Mali G52MP2	Mali G52MP2
	RAM	4 GB	4 GB
	ROM	32 GB	32 GB
I/O Interfaces	HDMI IN	3	3
	HDMI OUT	1	1
	USB 2.0	1	1
	USB 3.0	1	1
	USB Type C	1	1
	Audio OUT - 3.5 mm (Jack)	1	1
	SPDIF	1	1
	Wi-Fi	Yes	Yes
	RS232	1	1
	RJ45 IN/OUT	1/1	1/1
Audio	Sound Channel	2.0	2.0
	Built-In Speaker	2 x 10 W	2 x 10 W
	Sound Pressure Level	80 dB	80 dB
	Peak Power	54 W	54 W
Power Supply	Power Supply	100-240V, 50/60Hz 3.5A	100-240V, 50/60Hz 4.5A
	Power Consumption (Max.)	335 W	425 W
	Power Consumption (Typ.)	165 W	225 W
Environmental Conditions	Operation Temperature	0°C~40°C	0°C~40°C
	Operation Humidity	10%~90% RH	10%~90% RH
Physical Specifications	Color	Black	Black
	Bezel	15.9 mm (U/L/R/B)	15.9 mm (U/L/R/B)
	Product Dimension (LxHxD)	1463.3 × 838.3 × 76.4 mm	1685.6 × 963.7 × 81.6 mm
	Set Weight	25.40 kg	34.65 kg
	Package Dimension (LxWXH)	1628 × 208 × 942 mm	1863 × 225 × 1090 mm
	Package Weight	33.25 kg	48.15 kg
	VESA Mounting	600 x 400 mm	800 x 600 mm
	Orientation	Landscape / Portrait	Landscape / Portrait
	Accessories	Remote Control x 1, Wall Mount x 1, HDMI Cable x 1, Power Cord x 1	

PRODUCT SPECIFICATION

MODEL NAME		LV-86UC	LV-98UC
Panel	Screen Size (Diagonal)	86"	98"
	Panel Type	ADS	ADS
	Resolution	3840(H) × 2160 (V)	3840(H) × 2160 (V)
	Back Light Unit	DLED	DLED
	Aspect Ratio	16:9	16:9
	Display Area	1895.04 (H) × 1065.96 (V) mm	2158.848 (H) × 1214.352 (V) mm
	Pixel Pitch	0.4935 × 0.4935 mm	0.5622 × 0.5622 mm
	Brightness	400 cd/m ²	450 cd/m ²
	Contrast Ratio	1200:1	1200:1
	Viewing Angle	178°/ 178° (H/V)	178°/ 178° (H/V)
	Display Colors	1.07B	1.07B
	NTSC	72%	72%
	Operation Hour	18/7	18/7
	Lifetime	≥50000 Hours	≥50000 Hours
	Refresh Rate	60 Hz	60 Hz
Internal Player	Operating System	Android 11.0	Android 11.0
	CPU	A55 × 4	A55 × 4
	GPU	Mali G52MP2	Mali G52MP2
	RAM	4 GB	4 GB
	ROM	32 GB	32 GB
I/O Interfaces	HDMI IN	3	3
	HDMI OUT	1	1
	USB 2.0	1	1
	USB 3.0	1	1
	USB Type C	1	1
	Audio OUT - 3.5 mm (Jack)	1	1
	SPDIF	1	1
	Wi-Fi	Yes	Yes
	RS232	1	1
	RJ45 IN/OUT	1/1	1/1
Audio	Sound Channel	2.0	2.0
	Built-In Speaker	2 x 10 W	2 x 10 W
	Sound Pressure Level	79 dB	80 dB
	Peak Power	54 W	54 W
Power Supply	Power Supply	100-240V, 50/60Hz 5.0A	100-240V, 50/60Hz 5.0A
	Power Consumption (Max.)	500 W	515 W
	Power Consumption (Typ.)	335 W	340 W
Environmental Conditions	Operation Temperature	0°C~40°C	0°C~40°C
	Operation Humidity	10%~90% RH	10%~90% RH
Physical Specifications	Color	Black	Black
	Bezel	15.9 mm (U/L/R/B)	25.9 mm (U/L/R/B)
	Product Dimension (LxHxD)	1930.8 × 1101.8 × 81.6 mm	2212.9 × 1268.4 × 79.4 mm
	Set Weight	50.7 kg	69.9 kg
	Package Dimension (LxWXH)	2110 × 225 × 1227 mm	2360 × 280 × 1425 mm
	Package Weight	60.75 kg	90.3kg
	VESA Mounting	800 x 600 mm	800 x 600 mm
	Orientation	Landscape / Portrait	Landscape / Portrait
Accessories	Remote Control x 1, Wall Mount x 1, HDMI Cable x 1, Power Cord x 1		

LOGIC

EMPOWERING DIGITAL TRANSFORMATION

Address

No. 741, Sri Krishna Temple Road,
Parallel to CMH Road, 1st Stage Indiranagar,
Opp Cake Walk, Bengaluru, Karnataka 560038



Customer Support Centre

Toll Free (India) : 1800 2020 990
For Services & Support : servicesupport@logicav.in
For Sales Enquiries : sales@logicav.in
Website : www.logicav.in

